
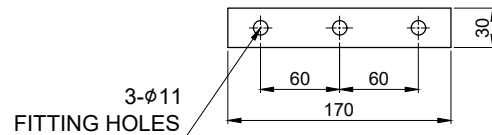



CABLE ENTRY PF1/2"

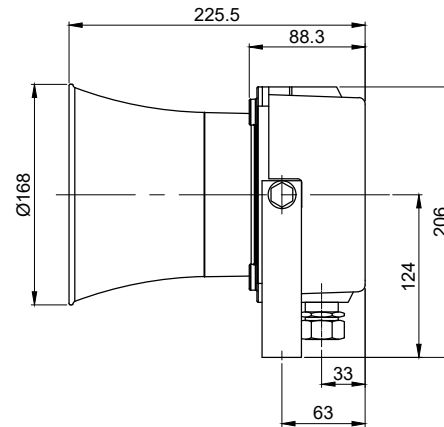

MARK	DATE	REVISION	REVISER	APP.BY
①				
②				
③				

MODEL NO		SEWN50L			
MATERIAL		HOUSING-AL			
		HORN HOUSING-PC/ SUS316L			
USE VOLT.	CURRENT	DC12V	2.440A		
		DC24V	1.186A		
		AC110V	0.244A		
		AC220V	0.122A		
KIND OF SOUND		WS	5 Warning Sounds		
		WP	5 Special Warning Sounds		
		WM	5 Melodies		
		WA	5 Alarms		
		WV	5 Customizable sounds		
VOLUME		MAX. 120dB			
PROTECTION GRADE		WATER & DUST PROOF IP56			
CABLE ENTRY		PF1/2"			
COLOR OF HOUSING		MUNSELL NO. 7.5BG 7/2			

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-							
FOR LINEAR DIMENSIONS		f	m	Ⓒ	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QT'Y	REFERENCE							
	0.5~3	±0.05	±0.1	±0.2	-		DSND BY		CHKD BY	CHKD BY	APRV BY	VIEW	DATE						
	3~6			±0.3	±0.5		J.Y. KIM		Y.H. JOO	-	J.W. KIM	3	2021.04.30						
	6~30	±0.1	±0.2	±0.5	±1		TITLE SEWN50L OUTLINE DRAWING						MODEL SEWN50L						
	30~120	±0.15	±0.3	±0.8	±1.5														
	120~400	±0.2	±0.5	±1.2	±2.5		DWG. NO. SEWN50L_OUT						SCALE N/S		SIZE A4		REV 00		SHEET 1/1
400~1000	±0.3	±0.8	±2	±4															
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°														
	10~50	±0°30'		±1°	±2°														
	50~120	±0°20'		±0°30'	±1°														
	120~400	±0°10'		±0°13'	±0°30'														