


1 2 3 4 5 6

A

EST56L-1-R : DC/AC  
EST56L-BZ-1-R : DC/AC  
EST56LF-1-R : DC/AC  
EST56LF-BZ-1-R : DC/AC

EST56L-2-RG : DC /AC  
EST56L-BZ-2-RG : DC/AC  
EST56LF-2-RG : DC/AC  
EST56LF-BZ-2-RG : DC/AC

EST56L-3-RAG : DC/AC  
EST56L-BZ-3-RAG : DC/AC  
EST56LF-3-RAG : DC/AC  
EST56LF-BZ-3-RAG : DC/AC

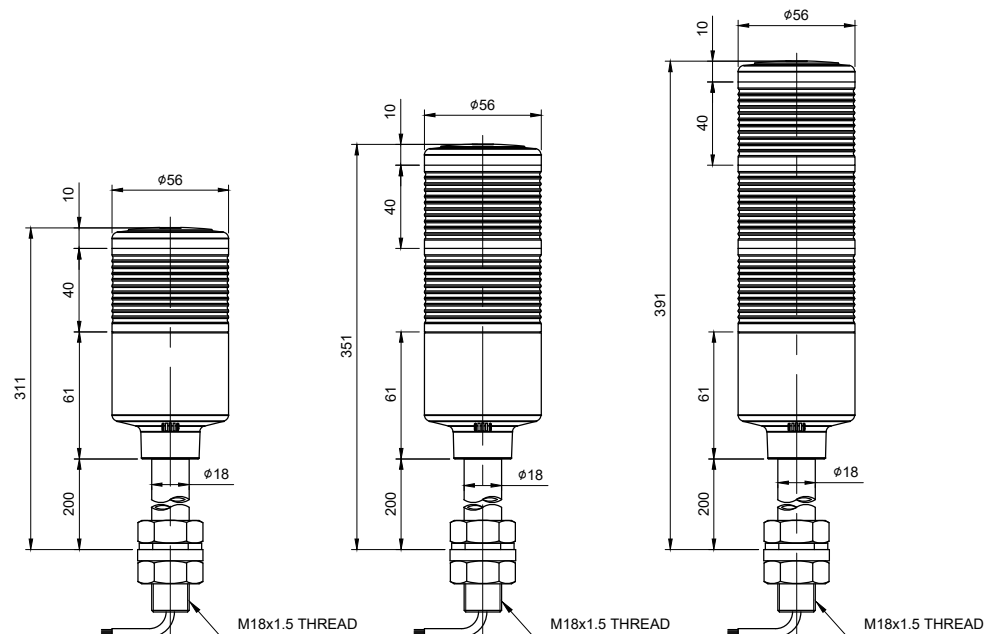

B

C

D

MARK	DATE	REVISION	REVISER	APP .BY
1				
2				
3				


MODEL NO		EST56L	
MATERIAL		HOUSING-ABS	
		LENS-AS	
		POLE-AL	
COLOR OF LENS		RED(    ), AMBER(    ), GREEN(    )	
FLASHING PER MIN.		60 ~ 80	
USE VOLT.	CURRENT	DC24V	Max. 0.165A
		AC220V	Max. 0.075A
VOLUME		MAX. 90 dB at 1m	
PROTECTION GRADE		WATER & DUST PROOF IP23	
COLOR OF HOUSING		IVORY(    ), BLACK(    )	
ACTION		LED STEADY/ FLASHING SIGNAL TOWER LAMP	

A

B

C

D

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH		-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	(C)	v			Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-			DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
	3~6			±0.3	±0.5			H.M.SEO	J.Y.KIM		J.W.KIM	3	2022.06.30
	6~30	±0.1	±0.2	±0.5	±1			TITLE EST56L OUTLINE DRAWING 					
	30~120	±0.15	±0.3	±0.8	±1.5								
	120~400	±0.2	±0.5	±1.2	±2.5								
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4			MODEL EST56L					
	0~10	±1°	±1°30'	±3°				DWG. NO. EST56L_OUT					
	10~50	±0°30'	±1°	±2°				SCALE	SIZE	REV	SHEET		
	50~120	±0°20'	±0°30'	±1°				N/S	A4	00	1/1		
	120~400	±0°10'	±0°13'	±0°30'				A4(297X210)					