


MARK	DATE	REVISION	REVISER	APP. BY
①				
②				
③				

MODEL NO	QAOL2(L)
MATERIAL	LENS-PC
	HOUSING-PC
COLOR OF LENS	AMBER
FLASHES PER MIN.	60 ~ 80
USE VOLT.	DC24V
PROTECTION GRADE	WATER & DUST PROOF IP55
CABLE ENTRY	Min. Ø5 LEAD HOLE
COLOR OF HOUSING	MAKER STANDARD
ACTION	LED LOW INTENSITY OBSTRUCTION LIGHT

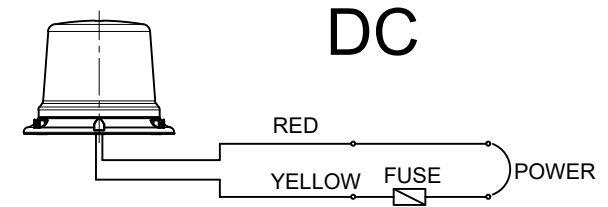

ELECTRICAL CONNECTION DIAGRAM

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	Ⓢ	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-		DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
	3~6			±0.3	±0.5		J.Y.KIM	J.I.BAE		J.K.HAN	3	2025.02.27
	6~30	±0.1	±0.2	±0.5	±1		TITLE			MODEL		
	30~120	±0.15	±0.3	±0.8	±1.5		QAOL2(L)			QAOL2(L)		
	120~400	±0.2	±0.5	±1.2	±2.5		OUTLINE DRAWING			QAOL2(L)_OUT		
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4					DWG. NO.		
	0~10	±1°		±1°30'	±3°					SCALE		
	10~50	±0°30'		±1°	±2°					SIZE		
	50~120	±0°20'		±0°30'	±1°					REV		
	120~400	±0°10'		±0°13'	±0°30'					SHEET		
										N/S		
										A4		
										00		
										1/1		