


FITTING HOLES
(SCALE:5:1)

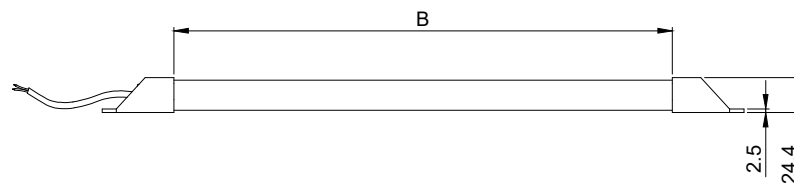

MODEL	A	B	C
QPHL/QPHLC-200	200	100	175
QPHL/QPHLC-300	300	200	275
QPHL/QPHLC-400	400	300	375
QPHL/QPHLC-500	500	400	475

*POWER CABLE : DC TYPE - UL2464 AWG22(0.3sq X 2C) 450mm
AC TYPE - VCTFK (0.75sq X 2C) 450mm

ISO2768-1 : CLASS OF TOLERANCE					
FOR LINEAR DIMENSIONS	0.5~3	f	m	c	Ⓥ
	3~6	±0.05	±0.1	±0.2	-
	6~30	±0.1	±0.2	±0.5	±1
	30~120	±0.15	±0.3	±0.8	±1.5
	120~400	±0.2	±0.5	±1.2	±2.5
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4
	0~10	±1°		±1°30'	±3°
	10~50	±0°30'		±1°	±2°
	50~120	±0°20'		±0°30'	±1°
	120~400	±0°10'		±0°13'	±0°30'

SURFACE FINISH

Nr.	DWG. NO.	TITLE/NAME	MAT'L	QTY	REFERENCE
DSND BY C.S.GWAK	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.K.HAN	VIEW 3	DATE 2021.07.27
TITLE QPHL/QPHLC OUTLINE DRAWING			MODEL QPHL/QPHLC		
			DWG. NO. QPHL/QPHLC_OUT		
			SCALE 1/1	SIZE A4	REV 00
			SHEET 1/1		

A4(297X210)