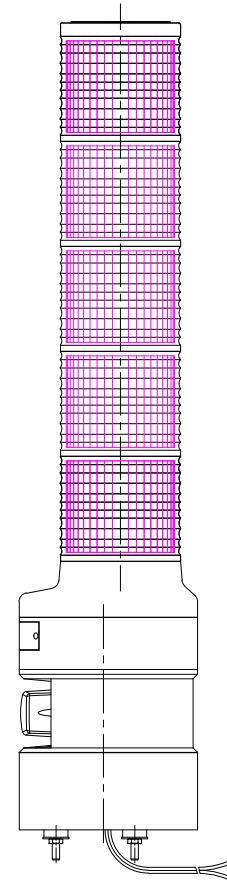
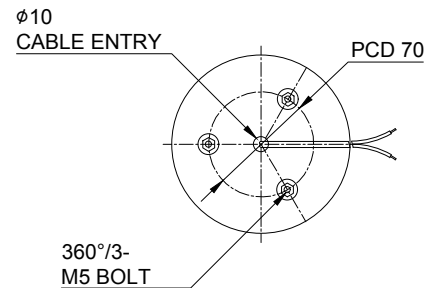


STNDL / STNDLF



LAYER	L
1	267
2	337
3	407
4	477
5	547



MARK	DATE	REVISION	REVISER	APP .BY
1				
2				
3				

MODEL NO			STNDL / STNDLF			
MATERIAL			HOUSING-ABS			
			LENS-AS			
			-			
COLOR OF LENS			RED(), AMBER(), GREEN(), BLUE(), WHITE()			
FLASHES. PER MIN			60 ~ 80			
USE VOLT.	LED	CURRNET	DC12V	0.5W	0.610A/LAYER1	
			DC24V		0.330A/LAYER1	
			AC110V ~ AC220V		MAX. 0.170A/LAYER1	
KIND OF SOUND			WS	WARNING SOUNDS		
			WP	SPECIAL WARNING SOUNDS 1ST GR.		
			WM	MELODIES		
			WA	ALARMS		
			WO	SPECIAL WARNING SOUNDS 2ND GR.		
			WN	SPECIAL WARNING SOUNDS 3RD GR.		
			SD CARD - MP3			
VOLUME			MAX. 105dB at 1m			
PROTECTION GRADE			WATER & DUST PROOF IP54			
CABLE ENTRY			ø10 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			LED STEADY / FLASHING LIGHT			

ISO2768-1 : CLASS OF TOLERANCE					
FOR LINEAR DIMENSIONS		f	m	(C)	v
	0.5~3	±0.05	±0.1	±0.2	-
	3~6			±0.3	±0.5
	6~30	±0.1	±0.2	±0.5	±1
	30~120	±0.15	±0.3	±0.8	±1.5
	120~400	±0.2	±0.5	±1.2	±2.5
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4
	0~10	±1°		±1°30'	±3°
	10~50	±0°30'		±1°	±2°
	50~120	±0°20'		±0°30'	±1°
	120~400	±0°10'		±0°13'	±0°30'

SURFACE FINISH	-	-	-	-	1	-	
	Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY	REFERENCE
	DSND BY S.H.KIM		CHKD BY J.H.PARK	CHKD BY 	APRV BY J.K.HAN	VIEW 3	DATE 2019.03.20
	TITLE STNDL / STNDLF OUTLINE DRAWING				MODEL STNDL / STNDLF		
					DWG. NO. STNDL / STNDLF_OUT		
					SCALE N/S	SIZE A4	REV 00

A4(297X210)