

1 2 3 4 5 6

A

B

C

D

A

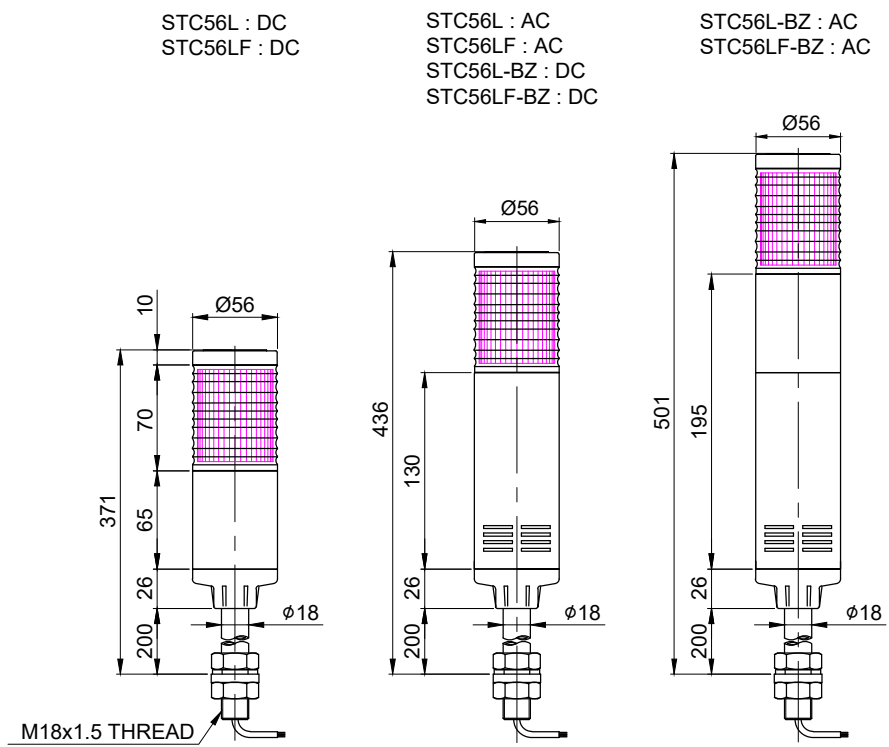
B



C

D

MARK	DATE	REVISION	REVISER	APP.BY
①				
②				
③				

MODEL NO			STC56L			
MATERIAL			HOUSING-ABS			
			LENS-PC			
			POLE-AL			
COLOR OF LENS			CLEAR			
FLASHING PER MIN.			60 ~ 80			
USE VOLT.	LED	CURRENT	DC12V	0.08W	0.215A	
			DC24V		0.185A	
			AC110V		0.110A	
			AC220V		0.075A	
VOLUME			MAX. 90dB at 1m			
PROTECTION GRADE			WATER & DUST PROOF IP44(Buzzer Type IP23)			
CABLE ENTRY			ø8 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			MULTIPLE COLORS LED SIGNAL STEADY/ FLASHING LIGHT			



ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	1	-			
FOR LINEAR DIMENSIONS		f	m	Ⓒ	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QT'Y	REFERENCE		
	0.5~3	±0.05	±0.1	±0.2	-		DSND BY S.H.KIM	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.K.HAN	VIEW 3	DATE 2019.03.20		
	3~6			±0.3	±0.5									
	6~30	±0.1	±0.2	±0.5	±1									
	30~120	±0.15	±0.3	±0.8	±1.5									
	120~400	±0.2	±0.5	±1.2	±2.5									
400~1000	±0.3	±0.8	±2	±4										
FOR ANGULAR DIMENSIONS	0~10	±1°	±1°30'	±3°		TITLE STC56L OUTLINE DRAWING			MODEL STC56L					
	10~50	±0°30'	±1°	±2°								DWG. NO. STC56L_OUT		
	50~120	±0°20'	±0°30'	±1°										
	120~400	±0°10'	±0°13'	±0°30'										

1 2 3 4 5 6

A4(297X210)