


1 2 3 4 5 6

A

B

C

D

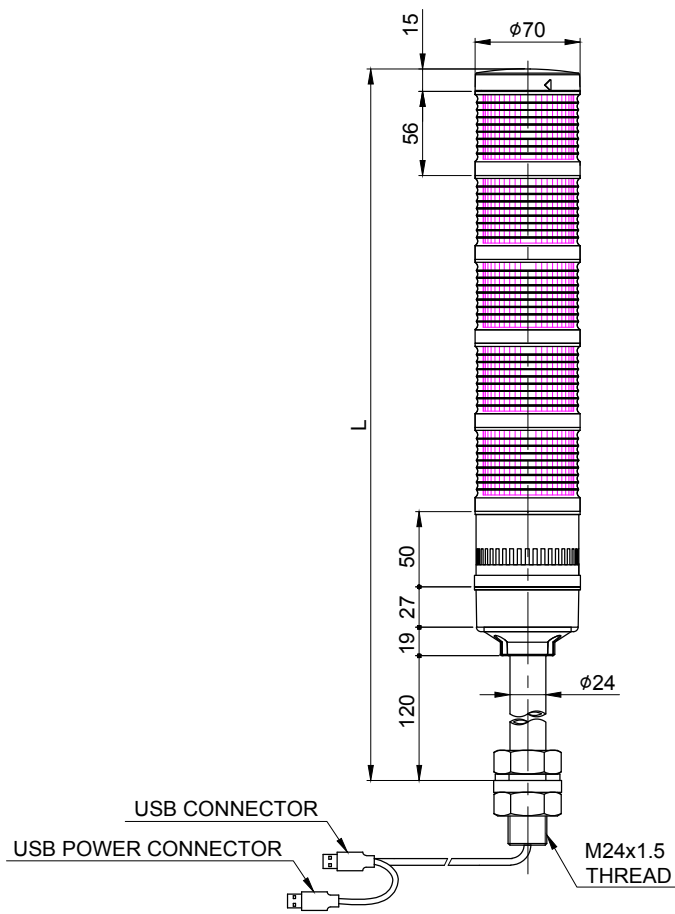

LAYER	L
1	287
2	343
3	399
4	455
5	511

MARK	DATE	REVISION	REVISER	APP .BY
①				
②				
③				

MODEL NO		QT70L-USB					
MATERIAL		HOUSING-PC					
		LENS-PC					
		COVER-PC					
COLOR OF LENS		RED(), AMBER(), GREEN(), BLUE(), WHITE()					
KIND OF FUNCTION		USE VOLT.	STEADY	FLASHES	STROBE	REVOLVING	
LED MODULE	USE VOLT.	LAYER 1 CURRNET (MAX.)	DC12V	0.100A	0.100A	0.120A	0.080A
			DC24V	0.050A	0.050A	0.120A	0.080A
			AC110V	0.020A	0.020A	-	-
			AC220V	0.020A	0.020A	-	-
WARNING SOUND MODULE			USB 5V	0.500A			
MELODY MODULE	USE VOLT.	CURRNET (MAX.)	USB 5V	0.500A			
ALARM MODULE			USB 5V	0.500A			
PROTECTION GRADE		WATER & DUST PROOF IP65					
CABLE ENTRY		φ8 LEAD HOLE					
COLOR OF HOUSING		MAKER STANDARD					
ACTION		LED SIGNAL TOWER LAMP					

FOR LINEAR DIMENSIONS	ISO2768-1 : CLASS OF TOLERANCE					SURFACE FINISH
	f	m	Ⓢ	v		
0.5~3	±0.05	±0.1	±0.2	-		
3~6			±0.3	±0.5		
6~30	±0.1	±0.2	±0.5	±1		
30~120	±0.15	±0.3	±0.8	±1.5		
120~400	±0.2	±0.5	±1.2	±2.5		
400~1000	±0.3	±0.8	±2	±4		
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°	
	10~50	±0°30'		±1°	±2°	
	50~120	±0°20'		±0°30'	±1°	
	120~400	±0°10'		±0°13'	±0°30'	

Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY	REFERENCE
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	
S.H.KIM	J.H.PARK		J.K.HAN	3	2019.03.20	
TITLE			MODEL			
QT70L-USB OUTLINE DRAWING			QT70L-USB			
			DWG. NO.		SHEET	
			QT70L-USB_OUT		1/1	
SCALE	SIZE	REV				
N/S	A4	00				

1 2 3 4 5 6

A4(297X210)