
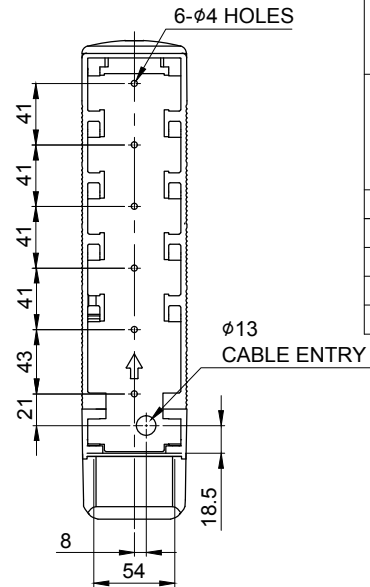



LAYER	L
1	154
2	195
3	236
4	277
5	318

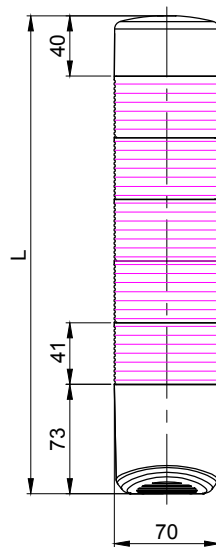

MARK	DATE	REVISION	REVISER	APP .BY
1				
2				
3				

MODEL NO			QWTD			
MATERIAL			HOUSING-ABS			
			LENS-PC			
			COVER-ABS			
COLOR OF LENS			RED( ), AMBER( ), GREEN( ), BLUE( ), WHITE( )			
USE VOLT.	LED	CURRENT	AC/DC12V	0.08W	0.486A	LAYER1
			AC/DC24V		0.340A	LAYER1
			AC110V		0.105A	LAYER1
			AC220V			
KIND OF SOUND			WS	5 Pre-Recorded Warning Sounds		
			WP	5 Pre-Recorded Special Warning Sounds		
			WM	5 Pre-Recorded Melodie		
			WA	5 Pre-Recorded Alarms		
VOLUME			MAX. 85dB at 1m			
PROTECTION GRADE			WATER & DUST PROOF IP54			
CABLE ENTRY			ø13 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			LED STEADY/FLASHING SIGNAL TOWERS			

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH		-		1		-	
FOR LINEAR DIMENSIONS		f	m	(C)	v			Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-			DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
	3~6			±0.3	±0.5			S.H.KIM	J.H.PARK		J.K.HAN	3	2019.03.20
	6~30	±0.1	±0.2	±0.5	±1								
	30~120	±0.15	±0.3	±0.8	±1.5								
	120~400	±0.2	±0.5	±1.2	±2.5								
FOR ANGULAR DIMENSIONS	400~1000	±0.3	±0.8	±2	±4			TITLE		QWTD		MODEL	
	0~10	±1°	±1°30'	±3°				QWTD OUTLINE DRAWING		QWTD		QWTD_OUT	
	10~50	±0°30'	±1°	±2°						DWG. NO.		SCALE	
	50~120	±0°20'	±0°30'	±1°						SIZE		REV	
	120~400	±0°10'	±0°13'	±0°30'						N/S		A4	
								00		1/1		A4(297X210)	