



S125R

PRODUCT SPECIFICATION

S125R | S125U
S125M

Materials Lens-AS, Housing-ABS,

Reflector-Heat resistant ABS

Ambient operating temperature -20°C to +50°C

Volume Max.90dB at 1m

Protection rating IP44, IP54

Revolving speed 120-140RPM

- Ø125mm standard-sized bulb revolving warning lights
- Adopts a special Power transmission system that reduces noise and wear

S125R Bulb Revolving Warning Light

Model number	Voltage	Current	Bulb			Certificates	Weight	Color
			Spec	Standard	Parts no			
S125R	DC12V	0.966A	12V10W	T16x35 15S	9	CE	0.40kg	R-Red
	DC24V	0.566A	24V10W	T16x35 15S	10		0.40kg	A-Amber
	AC110V	0.130A	12V10W	T16x35 15S	9		0.65kg	G-Green
	AC220V	0.065A	12V10W	T16x35 15S	9		0.65kg	B-Blue


· Protection rating: IP44

※ CE Compliant: DC12V, DC24V

Technical Diagram

Units: mm

S125R

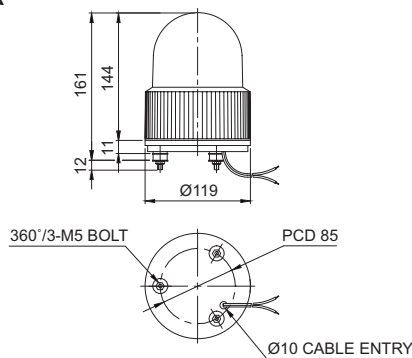

Wiring Instructions

- External Power line
UL1015 AWG18(0.75sq) x 2C 400mm
- DC Type: Black output line is negative(-)
- AC compatible type shall be connected the black and white wires when using AC110V, and the black and red wires when using AC220V.

Customization

- AC voltage switch built-in type: AC110V and AC220V can be selected with a built-in 110/220V switch.
- Wall mount bracket options: Bracket structure allows for threading through the bracket hole or into the wall mount



Wall Mount Bracket SWP125



Wall Mount Bracket SWM125

Ordering Specification

S125R	-	BZ	-	220	-	R
[Model number] S125R		[Buzzer option] (None) - No buzzer BZ - Built-in buzzer		[Voltage] 12-DC12V 24-DC24V 110-AC110V 220-AC220V		[Color] R-Red A-Amber G-Green B-Blue

S125 Series



S125M

S125M Bulb Revolving Signal Light for Vehicle


Model number	Voltage	Current	Bulb			Certificates	Weight	Color
			Spec	Standard	Parts no			
S125M	DC12V	0.966A	12V10W	T16x35 15S	9	CE	0.45kg	R-Red
	DC24V	0.566A	24V10W	T16x35 15S	10		0.45kg	A-Amber G-Green B-Blue

- Three Powerful magnets provide strong adhesion to the vehicle
- Power supply through cigarette lighter plug
- Protection rating: IP54

Technical Diagram

Units: mm

S125M

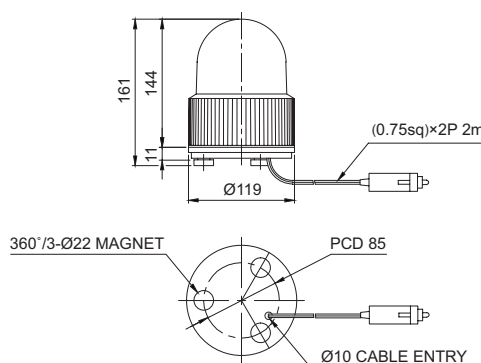

Wiring Instructions

- Cigarette lighter plug, IEC42(0.75sq) x 2P 2m

Customization

- AC Type

Ordering Specification

S125M	-	BZ	-	24	-	R
[Model number] S125M		[Buzzer option] (None) - No buzzer BZ - Built-in buzzer		[Voltage] 12-DC12V 24-DC24V		[Color] ● R-Red ● A-Amber ● G-Green ● B-Blue