
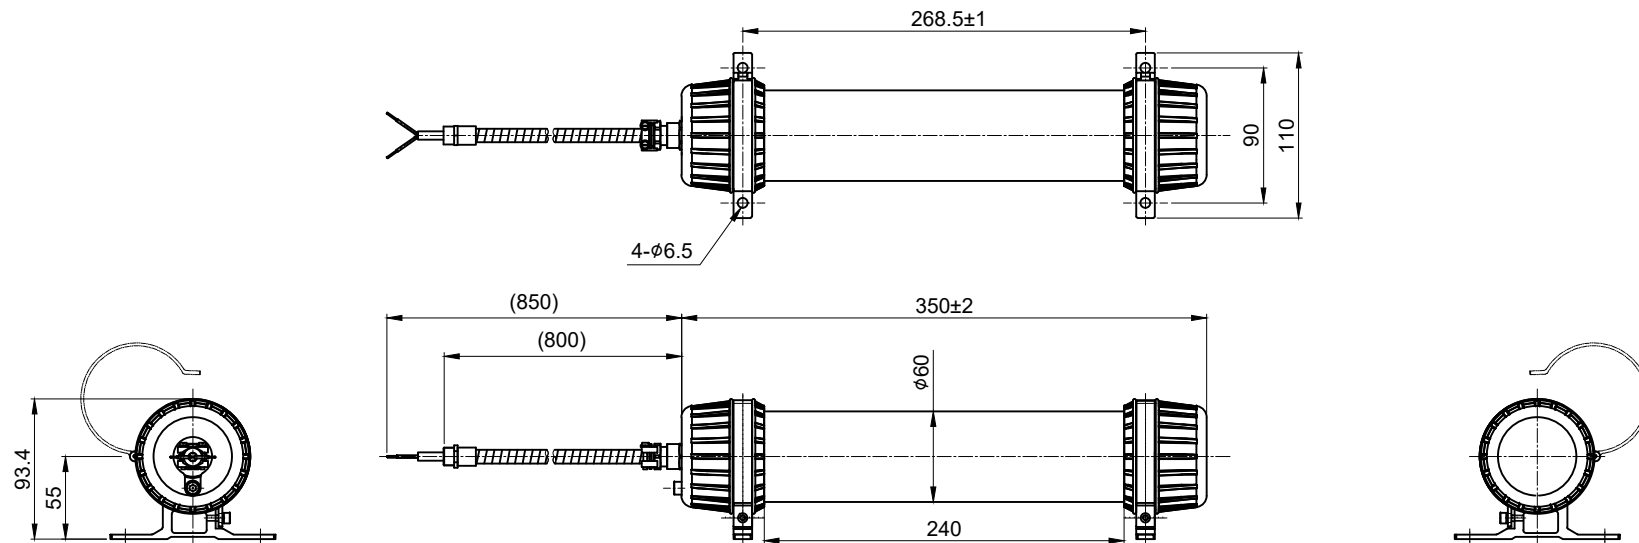



MARK	DATE	REVISION	REVISER	APP .BY
①				
②				
③				

MODEL NO		QLEX-350-24	
MATERIAL		HOUSING (SIDE COVER) - AL	
		OUT PACKING (PACKING COVER OUT) - NBR	
		LENS (GLOBE) - PC	
COLOR OF LENS		TRANSLUCENT	
USE VOLT.	CURRENT	DC24V	MAX. 0.36A
PROTECTION GRADE		Ex d IIC T6 IP66/IP67	
CABLE ENTRY		M12 or 20 OR NPT1/2 or PF 1/2 or PT1/2	



1. POWER CABLE - Dura & Flex-F-Vu (0.5sq) 850mm

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-	
FOR LINEAR DIMENSIONS		f	m	⊙	v		Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QT'Y	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-	DSND BY J.Y. KIM	CHKD BY Y.H. JOO		APRV BY J.K. HAN	VIEW 3	DATE 2020.07.22		
	3~6			±0.3	±0.5								
	6~30	±0.1	±0.2	±0.5	±1								
	30~120	±0.15	±0.3	±0.8	±1.5								
	120~400	±0.2	±0.5	±1.2	±2.5								
400~1000	±0.3	±0.8	±2	±4									
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°								
	10~50	±0°30'		±1°	±2°								
	50~120	±0°20'		±0°30'	±1°								
	120~400	±0°10'		±0°13'	±0°30'								
						QLEX-350 LAYOUT				MODEL QLEX SERISE			
										DWG. NO. QLEX-350-OUT			
										SCALE N/S	SIZE A4	REV 00	SHEET 1/1

Qlight