




MARK	DATE	REVISION	REVISER	APP .BY
1				
2				

MODEL NO		QAOL1		
MATERIAL		LENS-PC		
COLOR OF LENS		HOUSING-PC		
FLASHES PER MIN.		AMBER		
USE VOLT.		LED	CURRENT	DC15V ~ 30V
PROTECTION GRADE		MAX. 0.44A(at VDC24)		
CABLE ENTRY		WATER & DUST PROOF IP66		
COLOR OF HOUSING		φ9 LEAD HOLE		
ACTION		MAKER STANDARD		
		LED LOW INTENSITY OBSTRUCTION LIGHT		

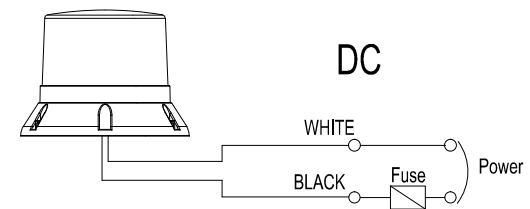

ELECTRICAL CONNECTION DIAGRAM

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-	
FOR LINEAR DIMENSIONS		f	m	Ⓒ	v		Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QT'Y	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-		DSND BY S.H.KIM	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.K.HAN	VIEW 3	DATE 2017.05.10	
	3~6			±0.3	±0.5								
	6~30	±0.1	±0.2	±0.5	±1								
	30~120	±0.15	±0.3	±0.8	±1.5								
	120~400	±0.2	±0.5	±1.2	±2.5								
400~1000	±0.3	±0.8	±2	±4									
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°					DWG. NO.  QAOL1_OUT			
	10~50	±0°30'		±1°	±2°					SCALE N/S	SIZE A4	REV 00	SHEET 1/1
	50~120	±0°20'		±0°30'	±1°								
	120~400	±0°10'		±0°13'	±0°30'								
	QAOL1 OUTLINE DRAWING												