

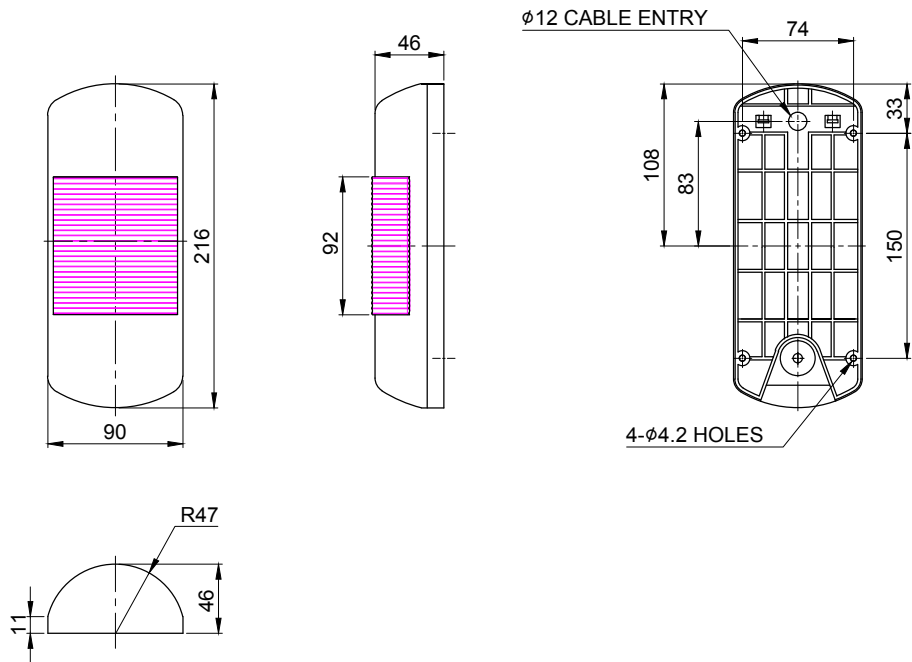
1 2 3 4 5 6

A

B



C

D



MARK	DATE	REVISION	REVISER	APP.BY
1				
2				
3				

MODEL NO			SWTCE			
MATERIAL			HOUSING-ABS			
			LENS-PC			
			COVER-ABS			
			FILTER LENS-PC			
COLOR OF LENS			RED(), AMBER(), GREEN()			
FLASHES PER MIN.			60~80			
USE VOLT.	LED	CURRENT	DC12V	0.08W	MAX. 0.445A	
			DC24V			
			AC110V			
			AC220V			
VOLUME			MAX. 90dB at 1m			
PROTECTION GRADE			WATER & DUST PROOF IP55			
CABLE ENTRY			ø12 LEAD HOLE			
COLOR OF HOUSING			MAKER STANDARD			
ACTION			MANY COLOR LED STEADY/ FLASHING LIGHT			

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-				
FOR LINEAR DIMENSIONS		f	m	Ⓒ	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QT'Y	REFERENCE				
	0.5~3	±0.05	±0.1	±0.2	-	DSND BY S.H.KIM	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.K.HAN	VIEW 3	DATE 2019.03.20					
	3~6			±0.3	±0.5											
	6~30	±0.1	±0.2	±0.5	±1	TITLE SWTCE OUTLINE DRAWING										
	30~120	±0.15	±0.3	±0.8	±1.5							MODEL SWTCE				
	120~400	±0.2	±0.5	±1.2	±2.5											
400~1000	±0.3	±0.8	±2	±4	DWG. NO. SWTCE_OUT											
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°											
	10~50	±0°30'		±1°	±2°							SCALE N/S		SIZE A4	REV 00	SHEET 1/1
	50~120	±0°20'		±0°30'	±1°											
	120~400	±0°10'		±0°13'	±0°30'											

1 2 3 4 5 6 A4(297X210)