

A

B

C

D

A


B

C

D

QTG(A)70L-USB-BZ

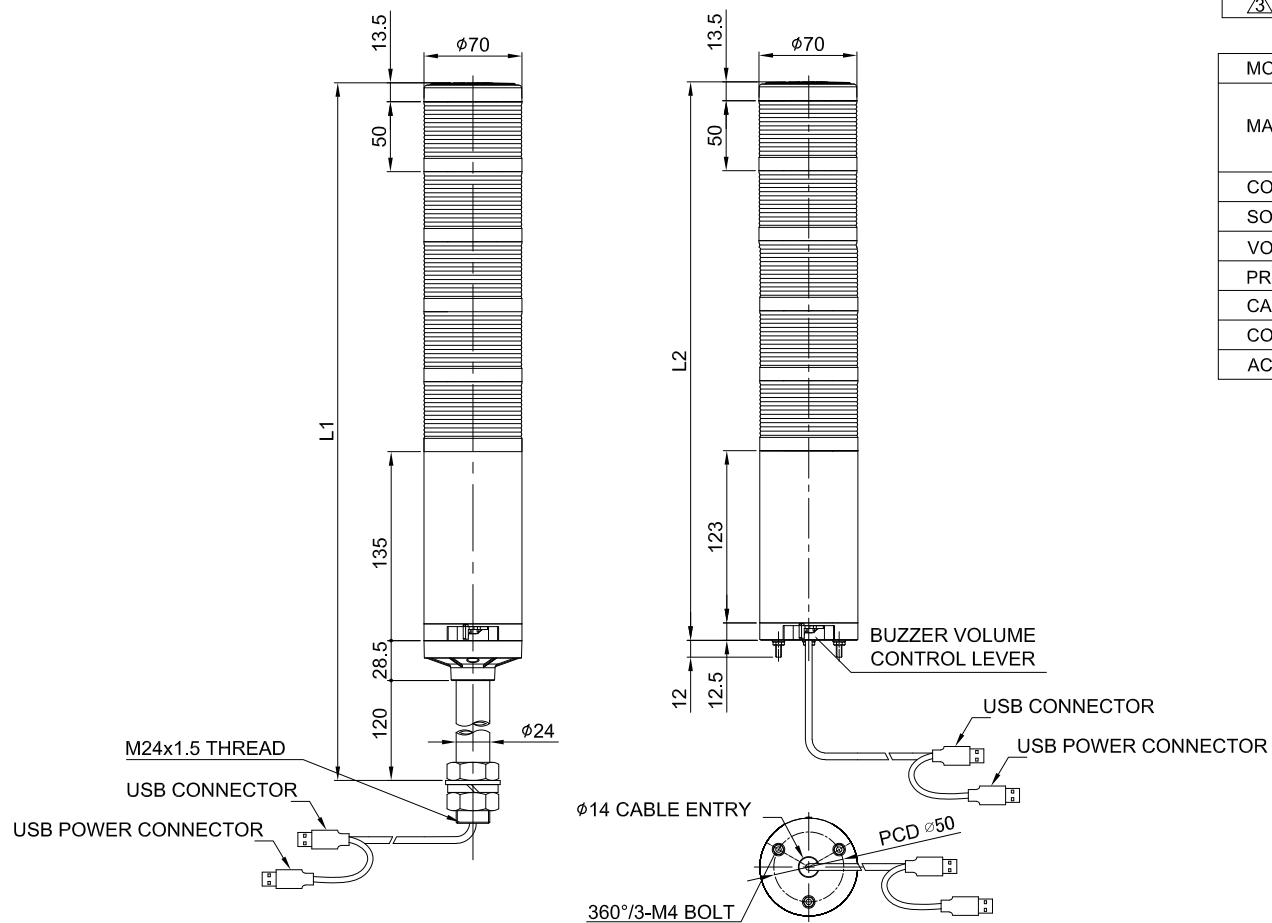

QTG(A)70ML-USB-BZ



MARK	DATE	REVISION	REVISER	APP .BY
△				
△				
△				

MODEL NO	QTG(A)70(M)L-USB	
MATERIAL	HOUSING-ABS	
	LENS-PC	
	PIPE-AL	
COLOR OF LENS	RED( ), AMBER( ), GREEN( ), BLUE( ), WHITE( )	
SOUND	BZ	5 Buzzer sounds
VOLUME	MAX. 90dB at 1m	
PROTECTION GRADE	WATER & DUST PROOF IP65 (BZ TYPE-IP54)	
CABLE ENTRY	φ14 LEAD HOLE	
COLOR OF HOUSING	MAKER STANDARD	
ACTION	LED STEADY / FLASHING LIGHT	

LAYER	L1	L2
1	357	199
2	407	249
3	457	299
4	507	349
5	557	399

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH	-	-	-	-	1	-
FOR LINEAR DIMENSIONS		f	m	⌀	v		Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
	0.5~3	±0.05	±0.1	±0.2	-		DSND BY J.H.PARK	CHKD BY J.H.PARK	CHKD BY 	APRV BY J.K.HAN	VIEW 3	DATE 2019.06.27
	3~6			±0.3	±0.5							
	6~30	±0.1	±0.2	±0.5	±1		TITLE QTG70(M)L-USB OUTLINE DRAWING			MODEL QTG70(M)L-USB		
	30~120	±0.15	±0.3	±0.8	±1.5							
	120~400	±0.2	±0.5	±1.2	±2.5							
400~1000	±0.3	±0.8	±2	±4								
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°				DWG. NO. QTG70(M)L-USB_OUT			
	10~50	±0°30'		±1°	±2°							
	50~120	±0°20'		±0°30'	±1°							
	120~400	±0°10'		±0°13'	±0°30'							
SCALE N/S												
SIZE A4												
REV 00												
SHEET 1/1												

A4(297X210)