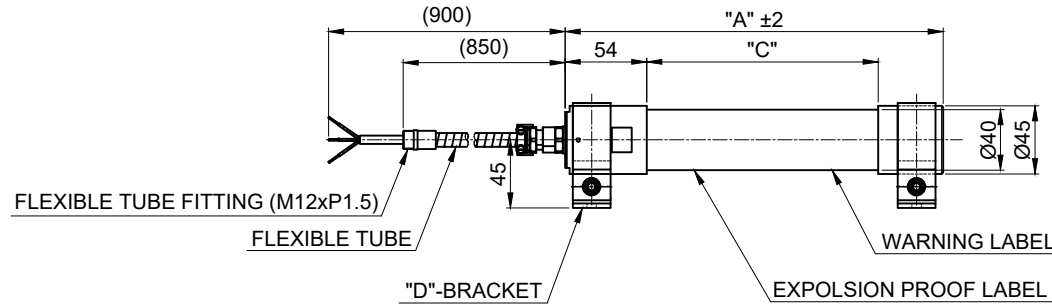
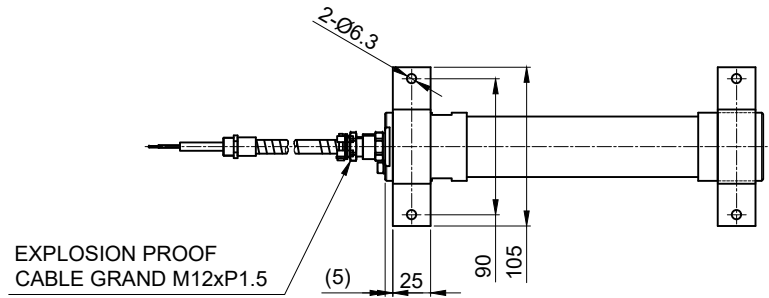
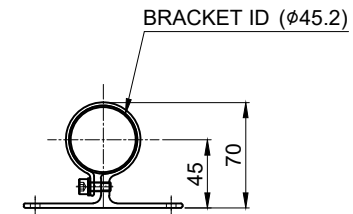


MODEL	"A"	"B"	"C"	"D"
QLEX-SLM-250	250	-	153	1EA
QLEX-SLM-650	650	615	553	2EA





MARK	DATE	REVISION	REVISER	APP. BY
1				
2				
3				

MODEL NO		QLEX-SLM-250/650	
MATERIAL		HOUSING ( SIDE COVER ) - AL	
		HOUSING ( END COVER) - AL	
		LENS ( GLOBE ) - PC	
COLOR OF LENS		TRANSLUCENT	
USE VOLT.	CURRENT	250	DC24V : 0.37A / AC220V : 0.04A
		650	DC24V : 0.83A / AC220V : 0.105A
PROTECTION GRADE		Ex d IIC T6 IP66/IP67	
CABLE ENTRY		M12xP1.5	



1. POWER CABLE  
- UL2464-AWG18(0.75sq)-3C-900mm

ISO2768-1 : CLASS OF TOLERANCE					
FOR LINEAR DIMENSIONS	0.5~3	f	m	Ⓢ	v
	3~6	±0.05	±0.1	±0.2	-
	6~30	±0.1	±0.2	±0.3	±0.5
	30~120	±0.15	±0.3	±0.5	±1
	120~400	±0.2	±0.5	±0.8	±1.5
	400~1000	±0.3	±0.8	±1.2	±2.5
FOR ANGULAR DIMENSIONS	0~10	±1°	±1°30'	±2°	±3°
	10~50	±0°30'	±1°	±1°	±2°
	50~120	±0°20'	±0°30'	±1°	±1°
	120~400	±0°10'	±0°13'	±0°30'	±1°
	400~1000	±0°10'	±0°13'	±0°30'	±1°

SURFACE FINISH	-	-	-	-	1	-	
	Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY	REFERENCE
	DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	
	J.Y. KIM	Y.H. JOO		J.K. HAN	3	2020.07.22	
	TITLE				MODEL		
	QLEX-SLM-SERISE LAYOUT				QLEX SERISE		
					DWG. NO.		
QLEX LAYOUT							
SCALE					SIZE	REV	SHEET
	N/S	A4	00	1/1			