


QTG(A)50L-ETN-BZ

QTG(A)50ML-ETN-BZ

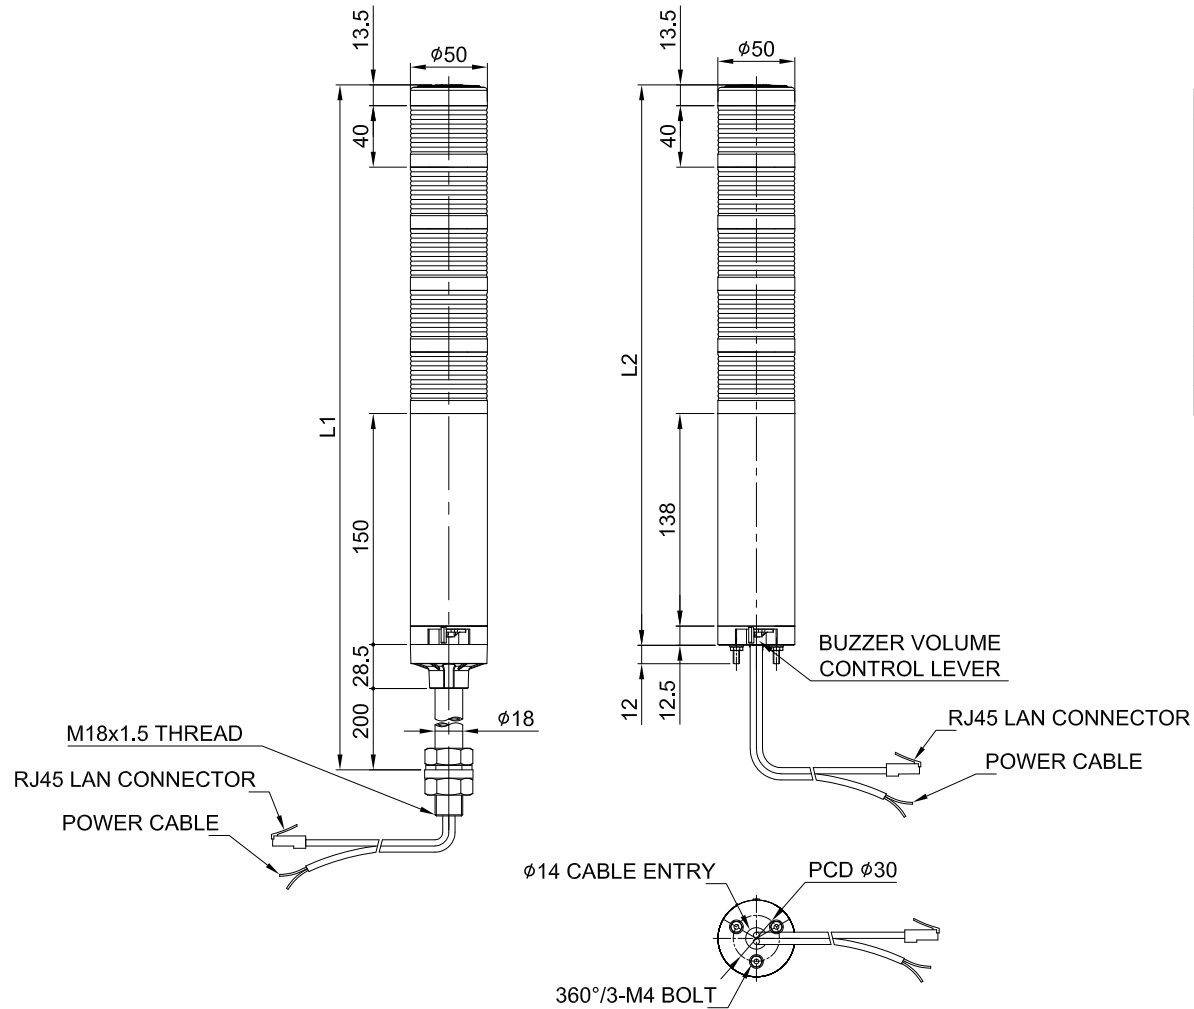

MARK	DATE	REVISION	REVISER	APP .BY
△				
△				
△				

MODEL NO	QTG(A)50(M)L-ETN	
MATERIAL	HOUSING-ABS	
	LENS-PC	
	PIPE-AL	
COLOR OF LENS	RED(), AMBER(), GREEN(), BLUE(), WHITE()	
SOUND	BZ	5 Buzzer sounds
VOLUME	MAX. 90dB at 1m	
PROTECTION GRADE	WATER & DUST PROOF IP65 (BZ TYPE-IP54)	
CABLE ENTRY	φ14 LEAD HOLE	
COLOR OF HOUSING	MAKER STANDARD	
ACTION	LED STEADY / FLASHING LIGHT	

LAYER	L1	L2
1	432	204
2	472	244
3	512	284
4	552	324
5	592	364

ISO2768-1 : CLASS OF TOLERANCE					
FOR LINEAR DIMENSIONS	0.5~3	f	m	Ⓢ	v
	3~6	±0.05	±0.1	±0.2	-
	6~30	±0.1	±0.2	±0.5	±1
	30~120	±0.15	±0.3	±0.8	±1.5
	120~400	±0.2	±0.5	±1.2	±2.5
	400~1000	±0.3	±0.8	±2	±4
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°
	10~50	±0°30'		±1°	±2°
	50~120	±0°20'		±0°30'	±1°
	120~400	±0°10'		±0°13'	±0°30'

SURFACE FINISH

-	-	-	-	1	-
Nr.	DWG. NO.	TITLE/ NAME		MAT'L	REFERENCE
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
J.H.PARK	J.H.PARK		J.K.HAN	3	2019.07.10
TITLE			MODEL		
QTG50(M)L-ETN OUTLINE DRAWING			QTG50(M)L-ETN		
			DWG. NO.		
			QTG50(M)L-ETN_OUT		
SCALE	SIZE	REV	SHEET		
N/S	A4	00	1/1		

A4(297X210)